

# LEO 30 T TECHNICAL DATA SHEET



SPECIFICATIONS	LEO 30 T
Working Height	approx. 30.00 m
Platform Height	approx. 21.00 m
Lateral Outreach	approx. 14.00 m
Safe load on cage	approx. 200 kg
Rotating working cage	180 degrees
Swivel range of art. top boom	180 degrees
Size of working cage (LxWxH)	approx. 1.2 x 0.8 x 1.1m
Overall length in travelling position	approx. 7.20 m
Overall width in travelling position	approx. 1.58 m
Overall height in travelling position	approx. 1.98 m
Range of rotation	450 degrees
Total weight	approx. 4200 kgs
Max. load on jack plate per plate	approx. 26 kN
Size of stabilizing jack plate	approx. 0.31 x 0.22 m
Surface load in standard work position	approx. 2 kN/m <sup>2</sup>
Ground pressure in travelling position	approx. 5.7N/cm <sup>2</sup>
Standard jacked area (L x W)	approx. 4.89 m x 4.34 m
Loading possibility (W x H)	approx. 2.40 x 1.10 m
Climbing ability	approx. 30 %
Driving speed	upto 3 km/h
Restricted jacked area (L x W)	approx.. 6.22 x 2.58 m
Restricted range of rotation (both sides narrow)	approx. 2 x 20 degrees
(one side narrow)	approx.. 220 degrees

AM ACCESS, UNIT G2, GREAT FENTON BUSINESS PARK, GROVE ROAD, HERON CROSS, STOKE-ON-TRENT ST4 4LZ.

TEL. 01782 849100 email. [amaccess@btconnect.com](mailto:amaccess@btconnect.com)






# AM ACCESS




The  
Complete  
Access  
Package

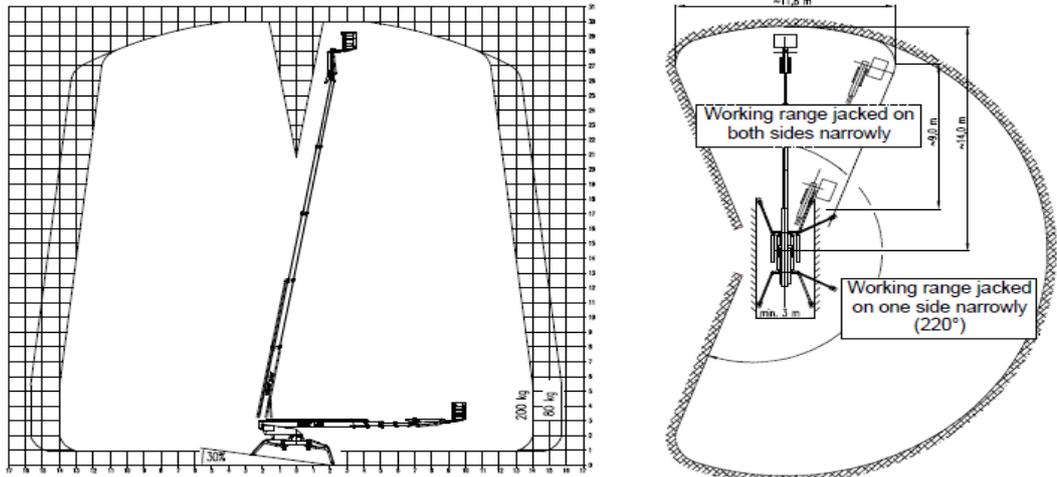


## Three in One

As truck version

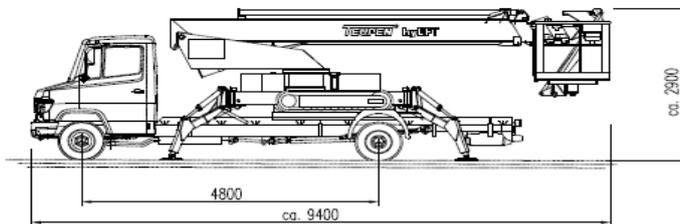


Max. load platform height: 1050 mm (unload)  
Max. load platform width: 2400 mm  
Min. load platform length: 5500 mm  
Minimum payload: 4200 kg  
Wheelbase min.: 4800 mm

As trailer version  
(compressed air  
braked)

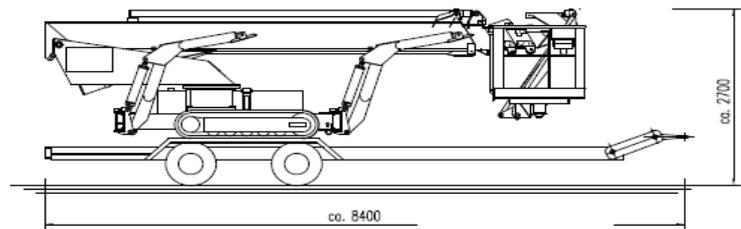

As self-  
propelled  
unit

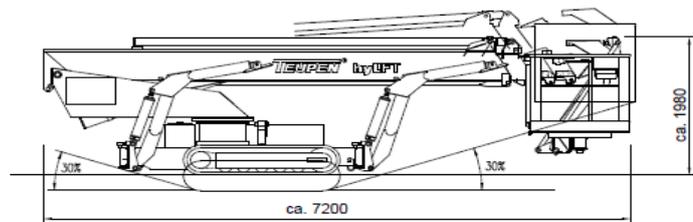

AM ACCESS, UNIT G2, GREAT FENTON BUSINESS PARK, GROVE ROAD, HERON CROSS, STOKE-ON-TRENT ST4 4LZ.

TEL. 01782 849100 email. [amaccess@btconnect.com](mailto:amaccess@btconnect.com)

